

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 11-034610  
(43)Date of publication of application : 09.02.1999

(51)Int. CI. B60C 9/22


(21)Application number : 09-191145 (71)Applicant : YOKOHAMA RUBBER CO LTD:THE  
(22)Date of filing : 16.07.1997 (72)Inventor : MAMA RIICHIRO

## (54) PNEUMATIC RADIAL TIRE

## (57)Abstract:

PROBLEM TO BE SOLVED: To effectively reduce middle-frequency road noises.

SOLUTION: This radial tire has a carcass layer 2 between a pair of right and left beads 1, 1 and a plurality of belt layers 5a, 5b outside the carcass layer 2 at tread part 4. Belt cover layers 6 arranged with organic fiber codes at the angel of 0-30 degrees in the peripheral direction of the tire are arranged such that they cover at least both ends of the belt layers 5a, 5b and that each of them extends more than 10 mm from the end of the belt of the outermost belt layer 5b to the center side and 15-40 mm to a shoulder side.

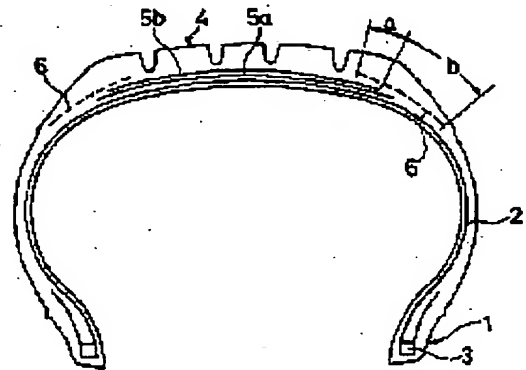

## LEGAL STATUS

[Date of request for examination] 18.05.2004

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against  
examiner's decision of rejection]  
[Date of extinction of right]

Copyright (C); 1998, 2003 Japan Patent Office